
Custom Steel Program

Door	Window
Pivot or Barrel Hinge	Fixed
Thermally Broken	Casement
	Folding
	Awning



Steel	12 gauge - foam filled
Glazing	Wet glazed with internal glass stop
Glass Stop Options	• Square Stop • Angled Stop (putty glaze style)
LowE Glass	VLT 72% / SHGC .56 / U .33
Divided Lite	TDL/SDL - 1” is the smallest
Sill	• Inswing with dam • Outswing • ADA

Standard Specifications and Options

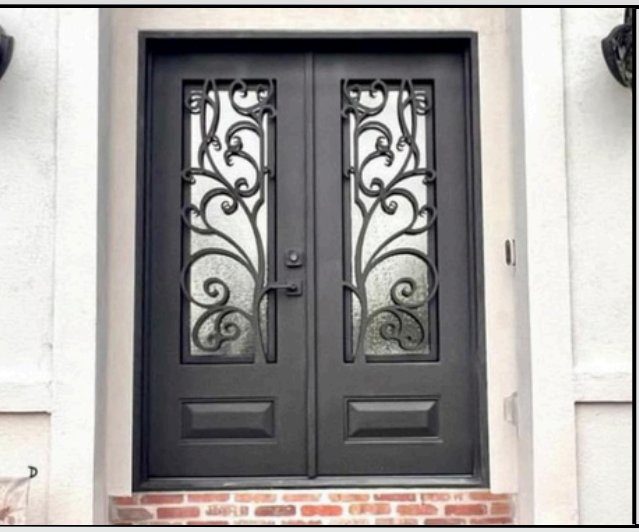

Jamb	Extentions vailable
Pull Handle	Modern and custom options available
Install Method	• Through jamb anchors for 7/16” lag bolts • 2” Mounting Tabs set 1/2” setback from interior • Nail fin 1-1/4” setback from exterior
Standard Prep	5-1/2" on center, 2-3/4" backset, 2-1/8" dia bore
Astragal	Edge mounted with head and foot bolts, top extension 72" from bottom of door. Strike plates provided by others to be surface mounted.
Seal	Door sweep and compression weatherstrip. included
Profile	Corners of stile, rail and jamb are rolled, not broken, will not be sharp 90 degree corners

12605 Wardline Rd
Hammond, LA 70401
www.prestigesteel.com
985-340-0902

Warranty

General	-5 Year Limited
Paint	-1 Year Limited
Insulated Glass	-5 Year Limited

Lead Time

16-18 Weeks from deposit

Effective as of: 4/21/25